

DS300




1.

2, 3
4

1

3가

.5

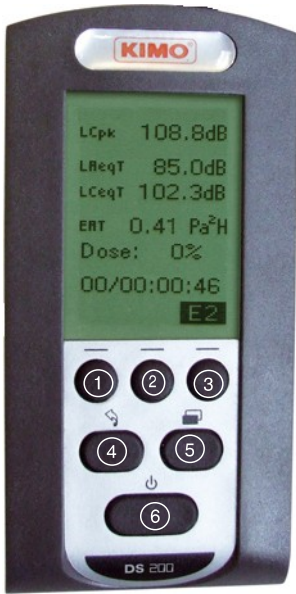

① ② ③

④

⑤

⑥





가
On/Off



2.



3

1-2-3



1. Contrast / backlight

가 :
 - 1, 2
 - "No" 가 , "Yes" 가
 5%
 : On/Off 가

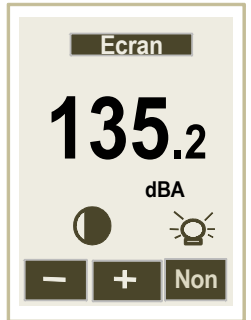


2. Measurement programming

V : V1 V1, V2
 Lpk : 가 C Z C 가 가
 Di : 가
 1s 1 ~ 60s 1s 가
 A/C : 2가 :
 - A C 가 가 Leq - A/C
 - A C 가 63Hz ~ 8kHz Leq
 A/C//63-8kHz



Alarm :

Audio :
 - : LAeq Lpk
 -
 -





3. Reading

> 2 3

> 1

> 3

> 4




4. PC

> 1

> 3

가
USB

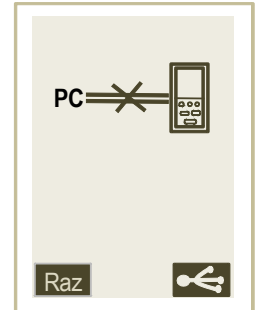

5. Configuration

> Language : French

English

> AutoOff :

> V.Stop :

> V.Lcd :

60


LCD

> Date/Time : /



6. Battery life

가

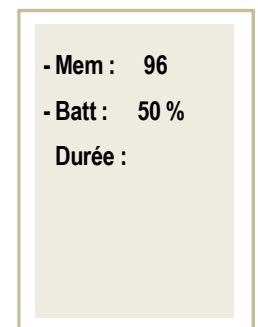

7. Instrument

-

-

-

(V1 V1, V2 D-MB)

8. About