


MP 55

- -
 -
 -
- 20




: ABS
: IP54
:
1 line LCD 1 x 5 digits.
Size : 50 x 20 mm
Height of digits :
Values : 9.2 mm
Units : 4.7 mm
: 200 g ()

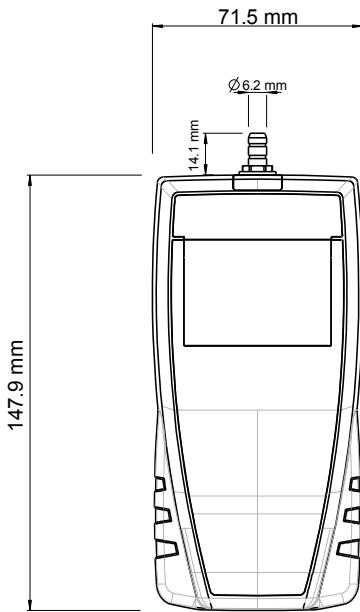

MP55

	mbar, mmHg, hPa
	From 700 to 1100 mbar
	±2 mbar
	0.1 mbar / 0.1 mmHg / 0.1 hPa
	T63 < 10
	Barbed connectors, Ø6.2 mm made of nickelled brass
	From 0 to +50 °C
	From -20 to +80 °C
	4 batteries AAA LR03 1.5 V
	180
	Directives CEM 2004/108/CE and NF EN 61010-1

The pressure deforms the silicon layer. This layer deformation generates a voltage at its terminations. This voltage is proportional to the pressure which is applied.

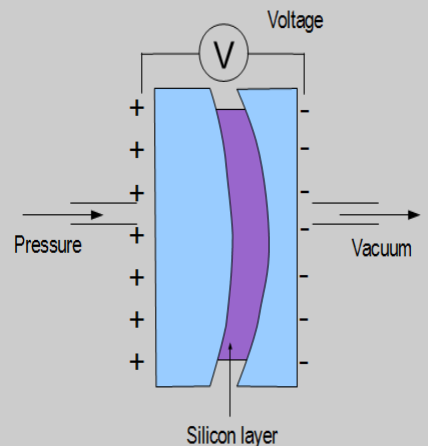

, 2x1



-
- ABS
-



(02-338-0023)

가 1

- On/Off/Hold
MP55

- Select 가

: MP55 : mbar, mmHg et hPa.

- Select

- On/Off/Hold
- Hold 가
- On/Off/Hold

-
- AAA LR03 1.5 V.
- 가

« Selection »

« On/Off/Hold »



20

OFF



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
 e-mail : export@kimo.fr