

SL 100

SL 100

- : 1 W/m² ~ 1300W/m²
- : 1 Wh/m² ~ 500kWh/m²
- : 0.5
- : 5%
- : 1 (60)
- : (Wh/m²) : 3 , off
- : -10 ~ 50
- : -10 ~ +55
- : 58 x 120 x 33mm
- : 72
- ()
- : 3 LR 3-AAA

RoHS



- : 400 ~ 1100nm
- : 100mv (1000 W/m²)
- : 80 °
- : +0.1% /
- : 1cm²
- : -30 ~ +60
- : 100%RH
- UV : excellent (PMMA)
- : photovoltaic ()
- :
- : PMMA
- : , PMMA
- : 60g
- : 30 x 32mm
- : 1.25m

* SL100 : (WRR)
- 1


W/m²

(Wh/m²)
DD() / HH() / MM () / SS()
- OFF (Wh/ m²)

SL 100

- ,
- 가
-



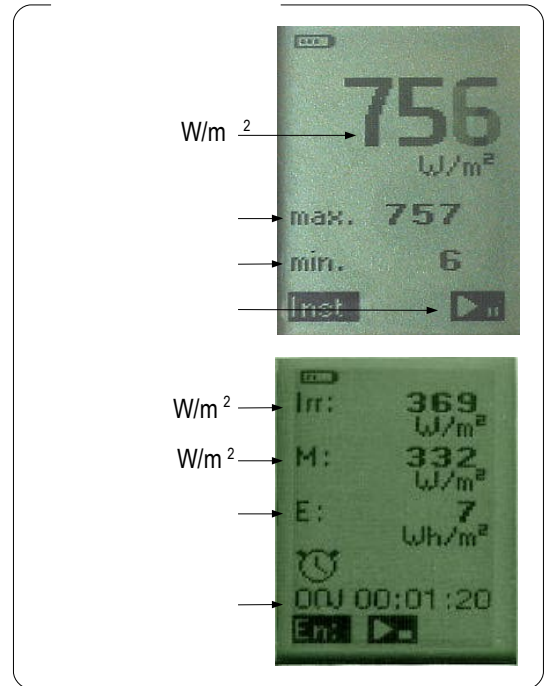

- ① ② ③
- ④ DEL /
- ⑤
- ⑥ on/off

Adjust contrast and activate backlight

Remind last checking date



3 LR3- AAA

: 5m, 10m,

