

TX

Pressure / Depression



TX

HP

가

-
-
-
-
-
-

가

2 ,


2 , 487

2 ,

PVC

	mm CE	Pascal	For 1 mm CE or 10 PA	
TX 25	2.5 - 0 - 2.5	25 - 0 - 25	20 mm	0.1 mm CE or 1 Pa
TX 50	5 - 0 - 5	50 - 0 - 50	15 mm	0.1 mm CE or 1 Pa
TX 75	7.5 - 0 - 7.5	75 - 0 - 75	10 mm	0.1 mm CE or 1 Pa

	From +5 to +30°C
	From -30 to +60°C
	6 bars
	20 mm
	Ø 4 mm
	20 x 2 mm.
	12 mm
	Horizontal positioning via integrated spirit level and milled, nickel-plated brass adjusting screw, vertical travel 12 mm.
	AWS 10 (0.87)
	20 ml
	5 x 8mm 6.2
	1/8 gas thread
	PVC (/)

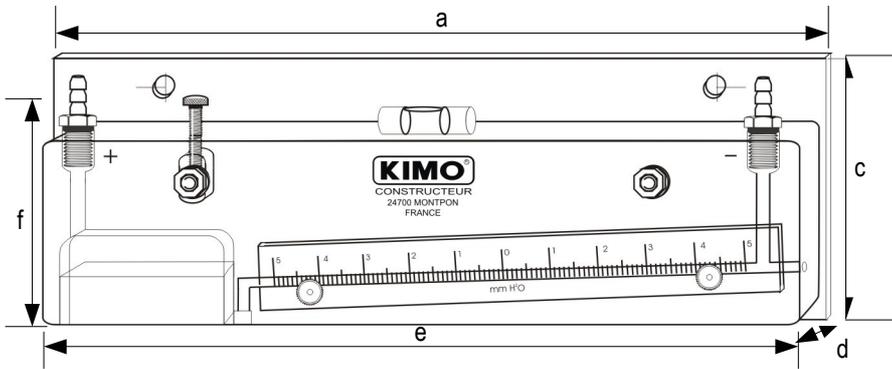

Référence	TX 25	TX 50	TX 75
a	184 mm	234 mm	234 mm
b	116 mm	166 mm	166 mm
c	80 mm	80 mm	80 mm
d	30 mm	30 mm	30 mm
e	180 mm	230 mm	230 mm
f	71 mm	71 mm	71 mm
	340 g	430 g	430 g

- 1. Ø 5 x 25 mm
- 2.
- 3.
- 4.
- 5. Ø 5x8

.....

"0"
 "+"가
 "- "가
 "+"가
 "- "가

TX

1

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT
 Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
 e-mail : export@kimo.fr

Ref. FTang - TX - 02/99 A - RCS 24 (24) Périgueux 349 282 095 Non-contractual document - We reserve the right to modify the characteristics of our products without prior notice.