



VT110 - VT115

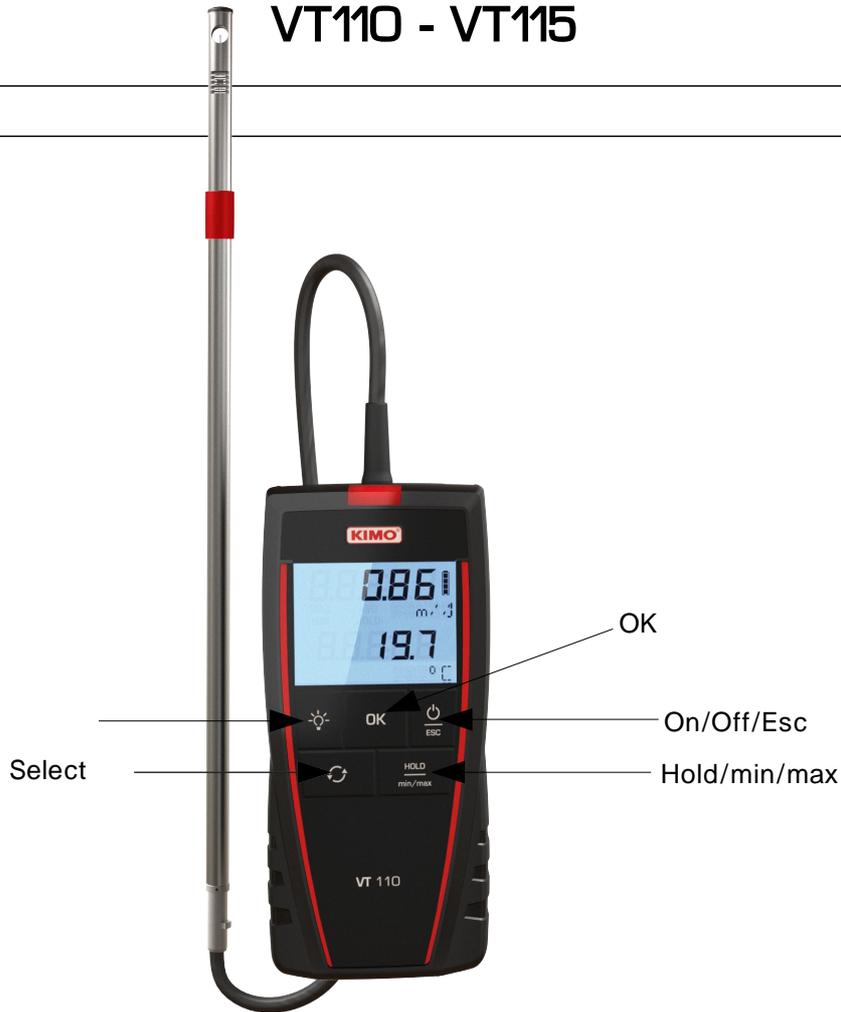


> On/Off/Esc
VT110 VT115

가

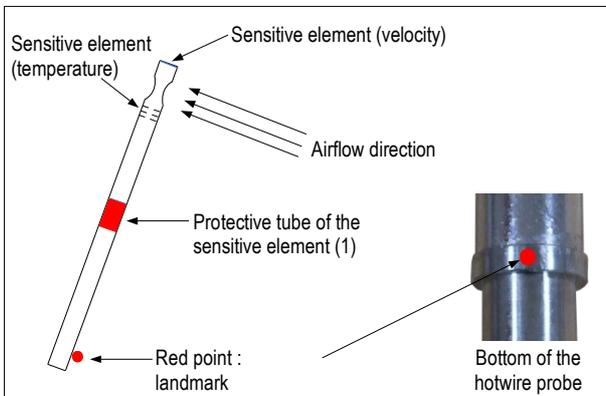

VT110 : Standard hotwire probe

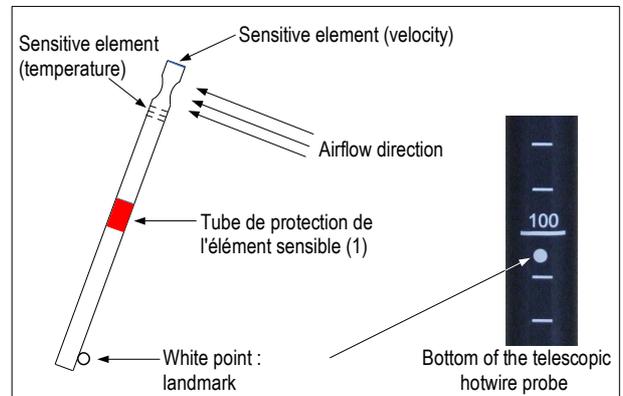

VT115 : Telescopic hotwire probe



- Standard hotwire
- Standard hotwire probe
- Telescopic hotwire probe

telescopic hotwire

(1)

- > OK Start 가
- > OK AVG 가 End 가
- > OK
- > OK
- > On/Off/Esc

- > Select MODE 가
- > OK 가
- > Select FLOW
- > OK
- > OK CONE Select CONE RECT CIRC
- > OK RECT, CIRC
- RECT CIRC
- > Select (CIRC) : DIAM OK m, inch 가
- Select (On/Off/Esc)
- Select (RECT) : LENGT 가 가
- Select (On/Off/Esc) OK
- Select WIDTH 가 Width 가
- Select (CONE) : CONE OK : K35, K75, K120, K150




Length Width


1~3000 mm

- > Hold/min/max 가
- > Hold 가 가
- > On/Off/Esc


- > Hold/min/max 가
- > Hold/min/max
- > On/Off/Esc

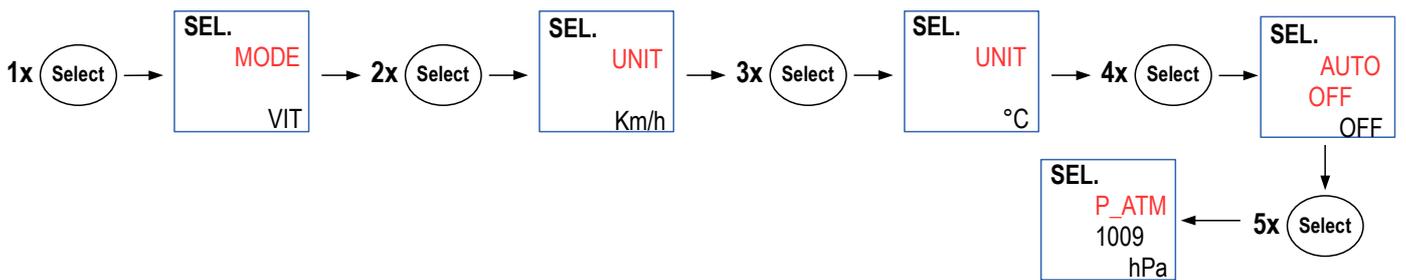


- > Select **MODE** 가
- > Select **UNIT** 가
- > OK 가 Select 가 ..
- > fpm, km/h, m/s.
- > OK
- > **UNIT**
- > On/Off/Esc

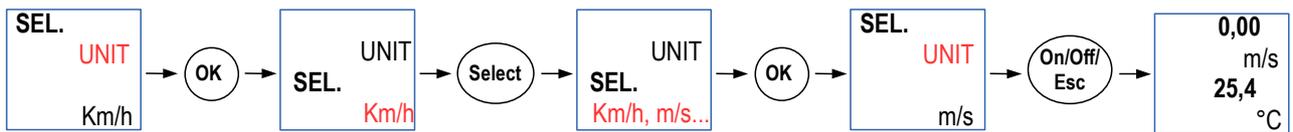

- > **UNIT** Select
- > OK 가
- > Select 가 .. m³/h, L/s, fcm or m³/s.
- > OK
- > **UNIT**
- > On/Off/Esc

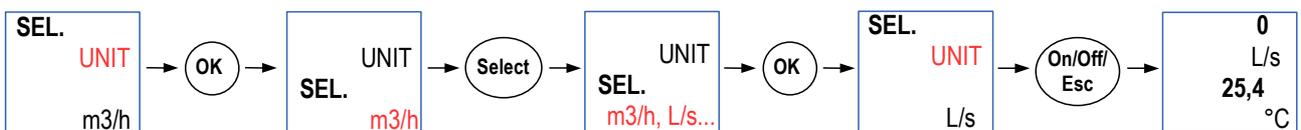

- > **UNIT** Select
- > OK 가
- > Select 가 .. °C, °F.
- > OK
- > **UNIT**
- > On/Off/Esc

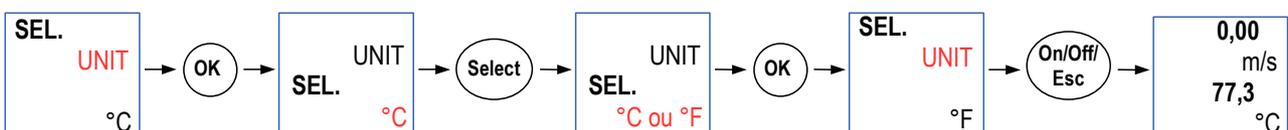

- > AUTO OFF 가 Select
- > OK auto shut-off 가
- > Select 가 가 : 15, 30, 45, 60, 75, 90, 105, 120, OFF
- > OK
- > On/Off/Esc



- > BEEP / Select
- > OK OFF ON
- > Select , ON , OFF
- > OK
- > On/Off/Esc



- > 가
- > 가

- > AAA LR03 1.5 V.
- > 가

Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE

www.kimo.fr

EXPORT DEPARTMENT
 Boulevard de Beaubourg - Emerainville - BP 48
 77312 MARNE LA VALLEE CEDEX 2
 Tel : + 33.1.60.06.69.25 - Fax : + 33.1.60.06.69.29

