



**VT 50**

- - 
  - 
  -
- 20

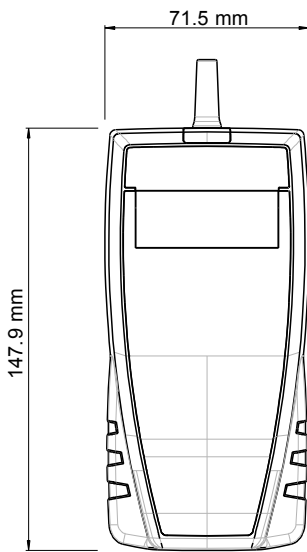

: ABS

: IP54

: 1 line

LCD 1 x 5 digits

Size : 50 x 20 mm

**Height of digits :**

Values : 9.2 mm

Units : 4.7 mm

: 200 g ( )



	°C, °F	m/s, fpm, km/h
	From -20 to +80 °C	From 0.15 to 30 m/s
	±0.3% of reading ±0.25°C	From 0.15 to 3 m/s : ±3% of reading ±0.05 m/s From 3.1 to 30 m/s : ±3% of reading ±0.2 m/s
	0.1 °C	From 0 to 3 m/s : 0.01 m/s From 3 to 30 m/s : 0.1 m/s
	T90 = 1 s for V <sub>air</sub> = 1 m/s	T63 = 6 s
	NTC	Thermistor with a negative temperature coefficient
		From 0 to +50 °C
		From -20 to +80 °C
		4 batteries AAA LR03 1.5 V
		40
		Directives CEM 2004/108/CE and NF EN 61010-1

	316 L
	Ø 8 mm, length 300 mm
	From 0 to +50 °C
	PVC Ø 4.8 mm, length 2 m

\* All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation




- 
- ABS
- 

(02-338-0023)

가 1



(1)

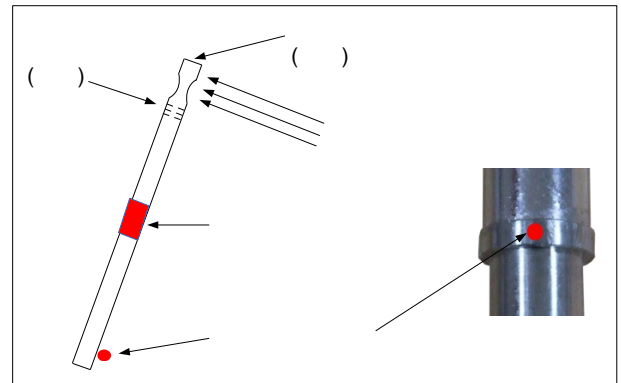

• On/Off/Hold . VT50

• Select 가 1  
2 가

• On/Off/Hold Hold 가

• Select 가

• On/Off/Hold

• Select : m/s, fpm, km/h.  
• Select 가  
• Select  
• Select Select

• Select 가 : °C or °F.  
• Select  
• Select

• AAA LR03 1.5 V.  
가

20

OFF

« Select »

« On/Off/Hold »



Once returned to KIMO, required waste collection will be assured in the respect of the environment in accordance to 2002/96/CE guidelines relating to WEEE.

[www.kimo.fr](http://www.kimo.fr)

Distributed by :



EXPORT DEPARTMENT  
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29  
e-mail : export@kimo.fr