

**KISTOCK DATALOGGER
KT50 / KH50 for HVAC**

/



- 가	- 2 setpoint	
	- 1 LCD	
- 가		(1000 /s)
- 16,000	- IP65(KT50)	IP40 (KH50)
- 2가 가		


60 x 40 x 21.5 mm
40 g
1 LCD : 26.5 x 22.5 mm
1 key : OK
Material ABS
Protection rating IP65 : KT50 IP40 : KH50
PC communication 1 USB
RoHS
2 x CR2032 가

	KT50	KH50
	°C, °F	°C, °F, %RH
	0.1 °C, 0.1 °F	0.1 °C, 0.1 °F, 0.1%HR
	Micro USB connector	
Setpoints alarms	2 setpoint	
	1 ~ 24	
	From -40 to +70 °C	From -20 to +70 °C
	From -40 to +85 °C	
	500 days*	365 days*

* on the basis of 1 measurement each 15 minutes at 25 °C

	NTC
	From -40 to +70 °C
	±0.4 °C (-20 °C < T < +70 °C) ±0.8 °C (beyond)

	Hygrometry	Temperature
	CMOS	
	From 5 to 95 %RH	From -20 to +70 °C
	Accuracy** (Repeatability, linearity, hysteresis) : ±2%HR (from 15°C to 25°C) Factory calibration uncertainty : ±0,88 %HR Drift linked to the temperature : ±0.04 x (T-20) %HR (if T < 15°C or T > 25°C)	From -20 to 0°C : 2% of displayed value ±0,6 °C From 0 to 30 °C : 0,5 °C From 30 to 70 °C : 1,5% of displayed value
(T _{0.63})	50 s (Vair = 2 m/s)	25 s (V = 2 m/s)

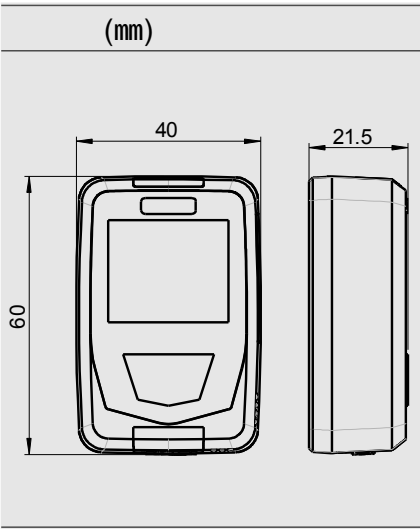

* All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.
 ** As per as NFX 15-113 and the charter 2000/2001 Hygrometers, GAL (Guaranteed Accuracy Limit) which has been calculated with a coverage factor value of 2 is ±2,88%RH between 18 and 28°C on the measuring range from 5 to 95%RH. Sensor drift is less than 1%RH/year.


KISTOCK
가

3가

- ()
-
-

6가

- ()
-
-
- 가 가
- "STOP"
- "OK" 5 , 가 가

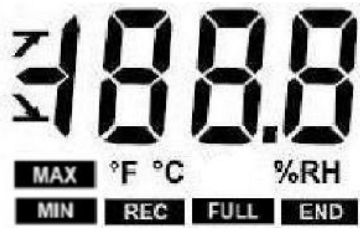

END

REC REC가

MIN

MAX



FULL

°C.. Temperature in degrees Celsius
 °F.. Temperature in degrees Fahrenheit
 %RH..... Relative humidity (KH 50)

: 80 - 90%
 : 90 - 100%
 : 가

batt

+ LED가 : 가

- WWW.Kimo.fr/kilog
 KILOGLITE
 PDF 가



- KILOG 가
- Ref. KILOG-N
- + 1 Ref. KIC2-N



KISTOCK

- USB cable - micro USB

KISTOCK PC 가

Ref. CK50

- Lace. Ref. KDC

- 2 CR2032 batteries pack . Ref. P2-50


KISTOCK 가

KISTOCK 1 가

KISTOCK

가 가

-
-

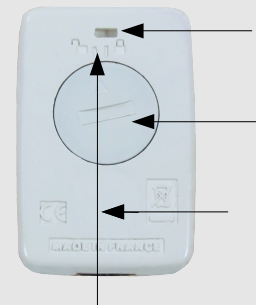

KISTOCK

500

- > : ..
- > (3V CR2032
- button)
- > . Opened
- padlock
- > :
- Closed padlock

www.kimo.fr

Distributed by :



EXPORT DEPARTMENT

Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29

e-mail : export@kimo.fr